



## Primary Function

## Alarm Transmission

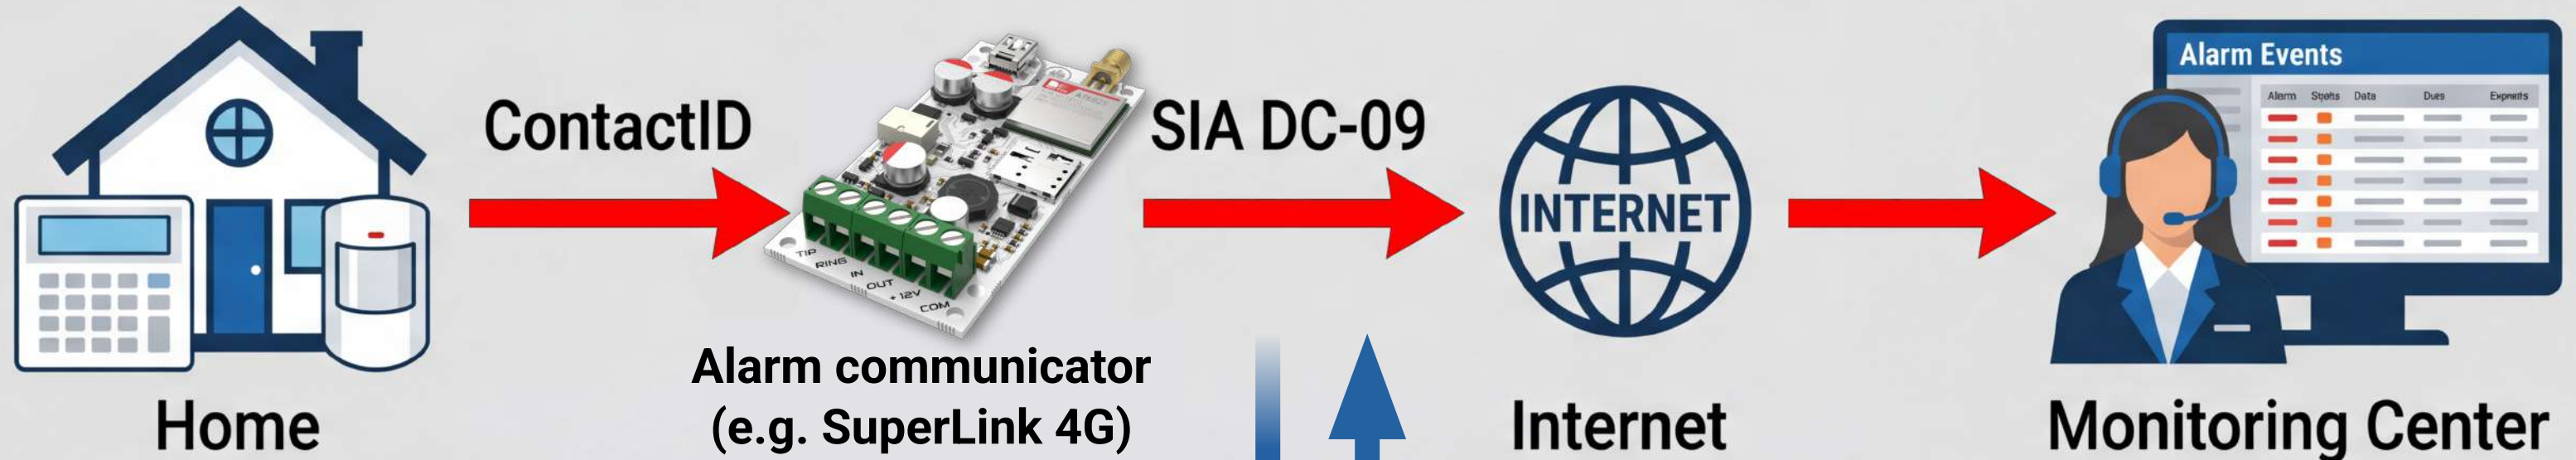


## Secondary Function

## Remote Management

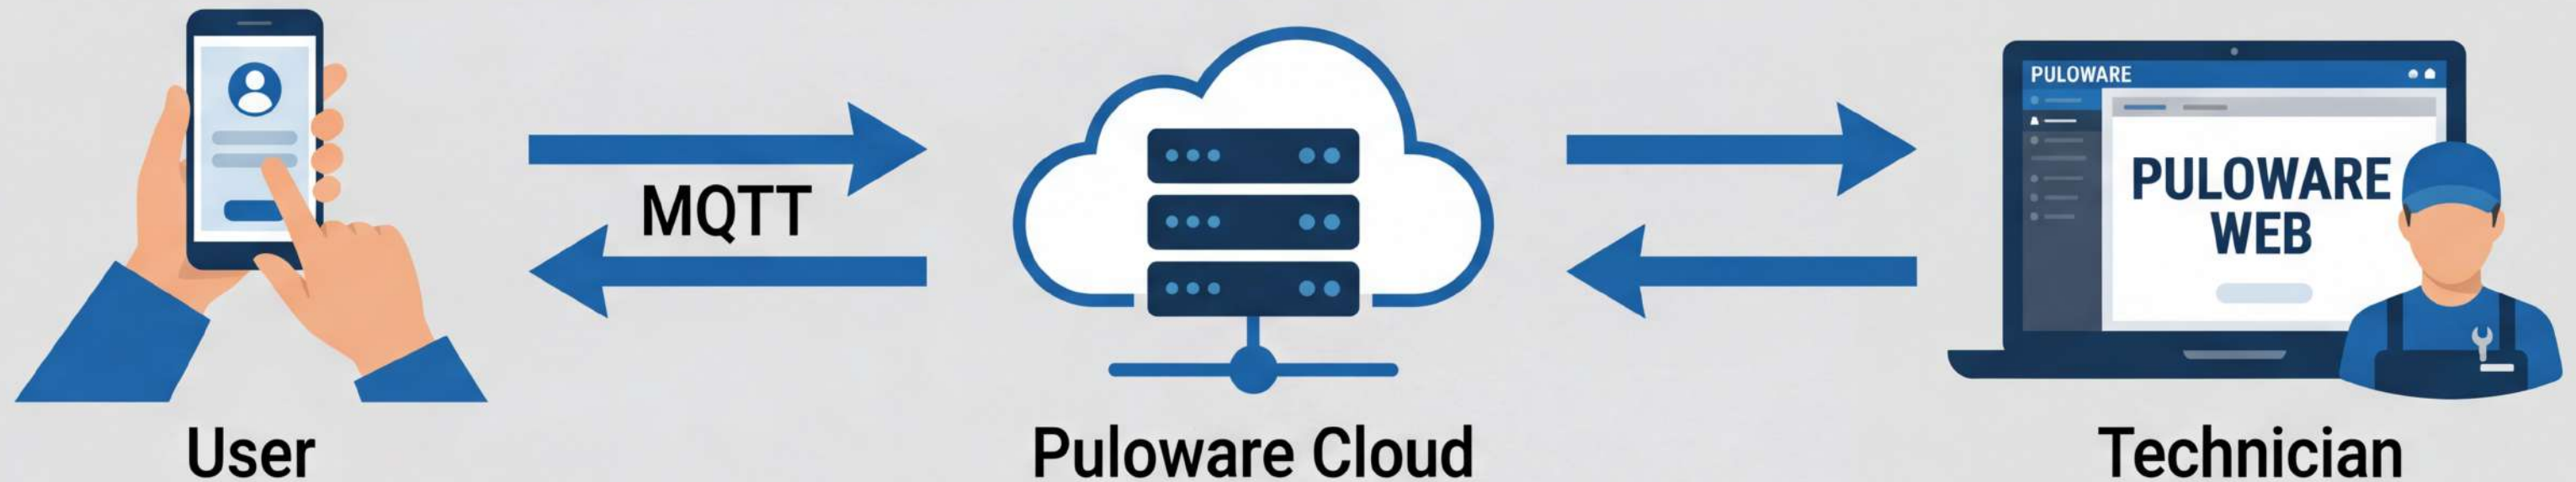

# Alarm monitoring communicators for traditional alarm systems


4G (LTE) network connectivity and SIA DC-09 communication




SC-GPRS 4G



SuperLink 4G

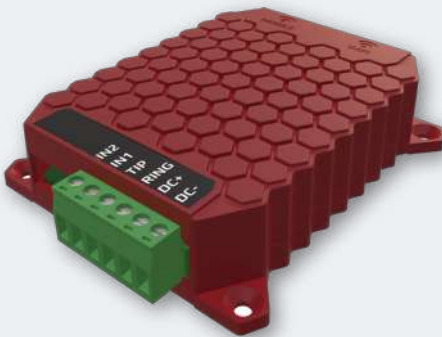

SC-4G

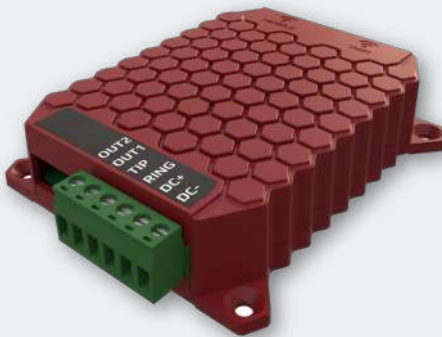

SINGULAR W4G


|                                            |           |           |           |           |
|--------------------------------------------|-----------|-----------|-----------|-----------|
| Network connection                         | 4G        | 4G        | 4G        | WIFI + 4G |
| Analog phone line for TIP/RING             | ✓         | ✓         | ✓         | ✓         |
| Contact inputs                             | 2         | 1         | 2         | -         |
| Relay outputs                              | -         | 1         | -         | 2         |
| Serial port for remote access to the panel | -         | -         | ✓         | ✓         |
| Remote management via the web interface    | ✓         | ✓         | ✓         | ✓         |
| Mobile App option                          | -         | ✓         | -         | ✓         |
| Number of remote monitoring receivers      | 2         | 2         | 2         | 2         |
| Option to exchange the object ID           | ✓         | ✓         | ✓         | ✓         |
| Data traffic monitoring for SIM cards      | ✓         | ✓         | ✓         | ✓         |
| USB connection                             | ✓         | ✓         | ✓         | ✓         |
| Additional supervisory circuit             | ✓         | ✓         | ✓         | ✓         |
| Full warranty                              | 24 months | 24 months | 24 months | 24 months |

# Alarm monitoring communicators with enhanced security

4G (LTE) network connectivity and SIA DC-09 communication



SC-4G DS

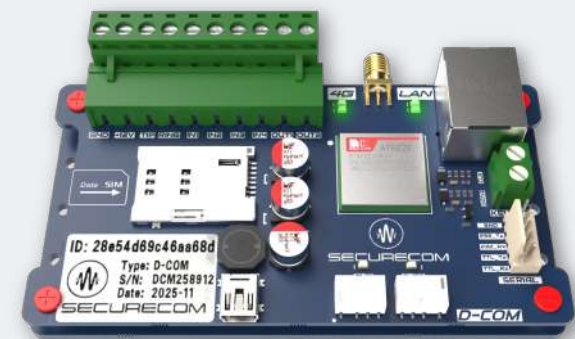


D-COM


| Network connection                         | 2 x 4G    | 4G + Ethernet |
|--------------------------------------------|-----------|---------------|
| Analog phone line for TIP/RING             | ✓         | ✓             |
| Contact inputs                             | 2         | 4             |
| Relay outputs                              | -         | 2             |
| Serial port for remote access to the panel | -         | ✓             |
| Remote management via the web interface    | ✓         | ✓             |
| Mobile App option                          | -         | -             |
| Number of remote monitoring receivers      | 2         | 2             |
| Option to exchange the object ID           | ✓         | ✓             |
| Data traffic monitoring for SIM cards      | ✓         | ✓             |
| USB connection                             | ✓         | ✓             |
| Additional supervisory circuit             | ✓         | ✓             |
| Full warranty                              | 24 months | 24 months     |

# Fire alarm communicators

4G (LTE) network connectivity and  
SIA DC-09 communication

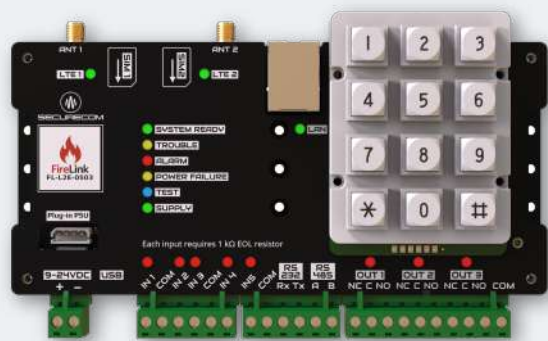

FireLink  
FL-L2E-0503

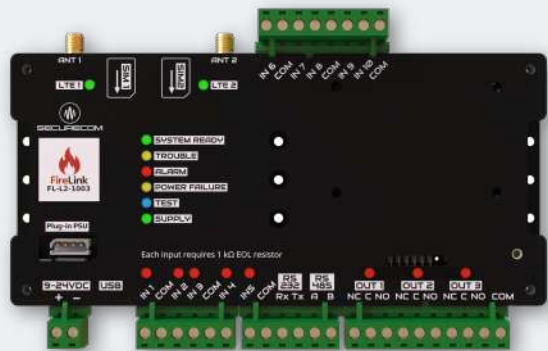

FireLink  
FL-L2-1003

|                                          |                   |               |
|------------------------------------------|-------------------|---------------|
| Network connection                       | 2 x 4G + Ethernet | 4G + Ethernet |
| Contact inputs                           | 5 (EOL)           | 10 (EOL)      |
| Relay outputs                            | 3                 | 3             |
| RS-485 Modbus RTU                        | ✓                 | ✓             |
| Keypad + Buzzer                          | ✓                 | -             |
| Remote management via the web interface  | ✓                 | ✓             |
| Number of remote monitoring receivers    | 2                 | 2             |
| MQTT 5.0 communication                   | ✓                 | ✓             |
| Data traffic monitoring for SIM cards    | ✓                 | ✓             |
| USB connection                           | ✓                 | ✓             |
| Additional supervisory circuit           | ✓                 | ✓             |
| Enclosed KIT version with power supply * | ✓                 | ✓             |
| Full warranty                            | 24 months         | 24 months     |

\* The KIT version is listed under a different product ID



## Monitoring station



**PULOWARE Cloud**

## Monitoring station



**PULOWARE Cloud**



### Remote diagnostics

- Full operation monitoring (network, I/O-s, status)
- Data traffic monitoring of SIM
- Displays TIP/RING events
- MS communication is visible
- Device and SIM-based search

### Remote configuration

- Change device settings
- Remote programming of alarm systems
- Remote control via web or app
- Firmware update

# WEB-based remote management