


FireLink FL-x

Multi-path fire alarm communicator

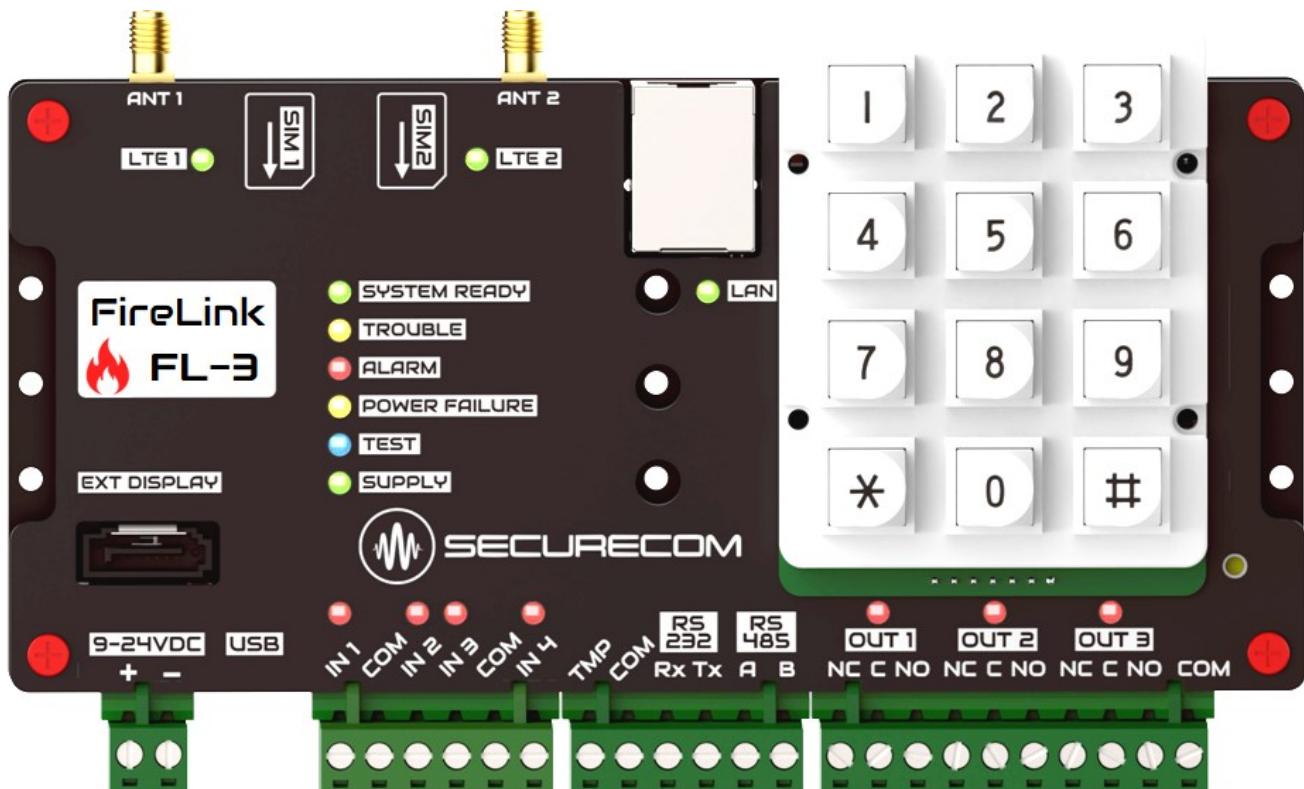

The FireLink FL-x transmits signals of fire alarm control panels to monitoring station. It generates events from contacts received on its inputs from the connected fire alarm control panel. The events are transmitted in a duplicated way to the monitoring receiver through its two independent modem units.

Hardware features:

- 2 x LTE-Cat1
- Ethernet 100 Base-TX
- 5 DEOL input
- 3 relay
- Buzzer
- Keypad
- RS-485
- RS-232
- Display extender port

Supported protocols:

- SIA DC-09 IP
- Modbus RTU
- MQTT 5.0
- PULOWARE remote management